

When performance counts most



PROFESSIONAL RECORDING
RADIO AND TV BROADCASTING
SOUND REINFORCEMENT SYSTEMS
AUDIOPHILE RECORDING • ENTERTAINMENT

MICROPHONES • HEADPHONES



**AKG
DATA
AND
PRICES**

**JANUARY 1,
1973**



K-100



K-180



K-2000



K-108



K-16TV



K-150




K-158/T-301

STEREO HEADPHONES

BOOM SETS

	K-16TV	K-100	K-150	K-180	K-2000	K-108	K-158 K-158/T-301
TYPE	DYNAMIC MONO	DYNAMIC STEREO	DYNAMIC STEREO	DYNAMIC STEREO	DYNAMIC MONO	DYNAMIC W/MICROPHONE	DYNAMIC W/MICROPHONE
DIRECTIONAL CHARACTERISTICS MICROPHONE Hz							
FREQUENCY RESPONSE MICROPHONE Hz						70 to 12,000	70 to 12,000
FREQUENCY RESPONSE HEADPHONES Hz	60-16,000	20-20,000	20-20,000	16-20,000	60-16,000	20 to 20,000	20 to 20,000
SENSITIVITY MICROPHONE						-58 dB 200 ohms	K-158 = -58 db : 200 ohms K-158 : T-301 = Transistzd. Preamp.
IMPEDANCE MATCHING HEADPHONES	4-10,000	4 to 10,000	4 to 10,000	4 to 10,000	4 to 10,000	4 to 10,000	4 to 10,000
CONTROLS				One each headphone for subjective response adjustment			
WEIGHT	5 oz.	12 oz.	11 oz.	21 oz.	2 oz.	15 oz.	15 oz.
CONNECTIONS	Prewired	Prewired	Prewired	Prewired	Prewired	Headphone in series Microphone unbalanced	Separate to each headphone Microphone balanced
ACCESSORIES INCLUDED	Standard mini jack	Standard 3-conductor stereo plug	Standard 3-conductor stereo plug	Standard 3-conductor stereo plug	Standard mini jack	Z-65 ear cushions	Z-64 ear cushions
PROFESSIONAL USER NET	\$15.95	\$29.00	\$39.00	\$69.00	\$5.95	\$39.00	K-158 = \$60.00 K-158 / T-301 = \$70.00
OPTIONAL ACCESSORIES							

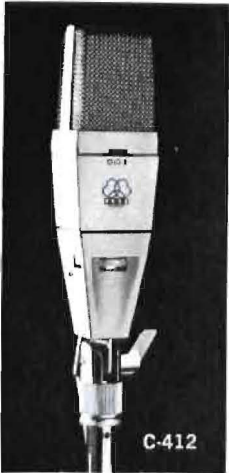

CONDENSER

	C-24	C-412	C-414	C-451E COMBINATION
TYPE	CONDENSER STEREO-TWIN	CONDENSER	CONDENSER	CONDENSER MODULAR
DIRECTIONAL CHARACTERISTICS	O/a/8	O/a/8	O/a/q/8	a
FREQUENCY RESPONSE Hz	20-20,000	20-20,000	20-20,000	30-20,000
UNIFORMITY OF RESPONSE**	±2 dB	±2 dB	± 2 dB	±2.5 dB
SENSITIVITY†	-39 dB	-42 dB	-42 dB	-41 dB
IMPEDANCE	50/200	200	200	200
FRONT-TO-BACK RATIO (1000 Hz)	20 dB	20 dB	20 dB	20 dB
DIMENSIONS IN INCHES	10 ¹ / ₈ x 1 ¹ / ₈	3 ¹ / ₈ x 1 ¹ / ₈ x 1 ¹ / ₄	3 ¹ / ₈ " x 1 ¹ / ₈ " x 1 ¹ / ₄ "	3 ¹ / ₄ x 5 ¹ / ₈
WEIGHT	System 29 lbs	Microphone & cable 3 lbs 14 oz	Microphone and cable 3 lbs 14 oz	4.5 oz
CONNECTIONS	1 = Shield 2 + 3 = Audio Connector 5B17C	1 = shield 2 + 3 = Audio and phantom circuit supply voltage from amplifier XLR-3	1 = Shield 2 + 3 = Audio and phantom circuit supply voltage from amplifier XLR-3	1 = Shield 2 + 3 = Audio and phantom circuit supply voltage from amplifier Cannon XLR-3
ACCESSORIES INCLUDED	Power supply Pattern selector Stand adapter Cable set Case	MK-17/20 cable	MK-17/20	Stand adapter Windscreen Case
PROFESSIONAL USER NET	\$995.00	\$340.00	\$375.00	\$189.00
OPTIONAL ACCESSORIES	ST-305 Anti-shock table stand	"N-46E a.c. power supply (operates six) B-46E d.c. power supply W-11 Windscreen ST-305 Anti-shock table stand	"N-46E a.c. power supply (operates six) B-46E d.c. power supply ST-305 Table stand W-11 Windscreen	See C-451E Components listing column. Special C-451E technical brochure with complete specifications and application information available on request or from your AKG dealer.

C-451E COMPONENTS

CK-1	Cardioid capsule	64.00
CK-1S	Cardioid capsule, rising response	64.00
CK-2	Omni capsule	64.00
CK-5	Cardioid capsule, shock-mount/windscreen	90.00
CK-6	Variable capsule Omni to cardioid to figure eight	160.00
CK-8	Short interference tube	90.00
CK-9	Interference tube (shotgun)	120.00
B-46E	Battery power supply	55.00
N-46E	a.c. power supply for two C-451E with bass cut and bass rolloff	200.00
N-6E	A.C. power supply for 6 C-451E	150.00
C-451E	Preamplifier only for all capsules	102.00
C-451EB	Preamplifier with bass Attenuator	122.00
C-452E	Preamplifier only, 48v powering	102.00
VR-1	12" extension tube	40.00
VR-2	52" extension tube	110.00
A-50/10	10 dB pad	18.00
A-50/20	20 dB pad	18.00
A-51	Swivel	25.00
A-52	Phantom power module for 1 C-451E	20.00
W-3	Windscreen for CK-1, CK-2	5.00
W-17	Windscreen for CK-1, CK-2	21.00
W-18	Windscreen for CK-8	10.00
W-19	Windscreen	30.00
H-7	Pistol grip	12.00
H-9	Adapter	15.00
H-10	Adapter	15.00
H-15	Suspension (spider), C-451E	25.00
H-60	Shock suspension, C-451E	16.00
H-69	Boom suspension, CK-9	49.00
H-70	Suspension, CK-9 W/SA-70/3	22.00
SA-15/1	Stand Adapter C-451E	7.00
SA-18/1	Stand adapter, C-451E	18.00
SA-18/3	Stand adapter, CK-9	18.00
SA-70/3	Stand Adapter CK-9	27.00
MC-20	20' microphone cable	14.00
MC-50	50' microphone cable	21.00


CA

TYPE	
DIRECTIONAL CHARACTERISTICS	
FREQUENCY RESPONSE Hz	
UNIFORMITY OF RESPONSE**	
SENSITIVITY†	
IMPEOANCE	
FRONT-TO-BACK RATIO (1000 Hz)	
DIMENSIONS IN INCHES	5
WEIGHT	
CONNECTIONS	2 Ca
ACCESSORIES INCLUDED	v SA
PROFESSIONAL USER NET	
OPTIONAL ACCESSORIES	AKG T

**Relative to the published curve

†(re 1 mW/10 dynes/cm²)

**Relative to tt

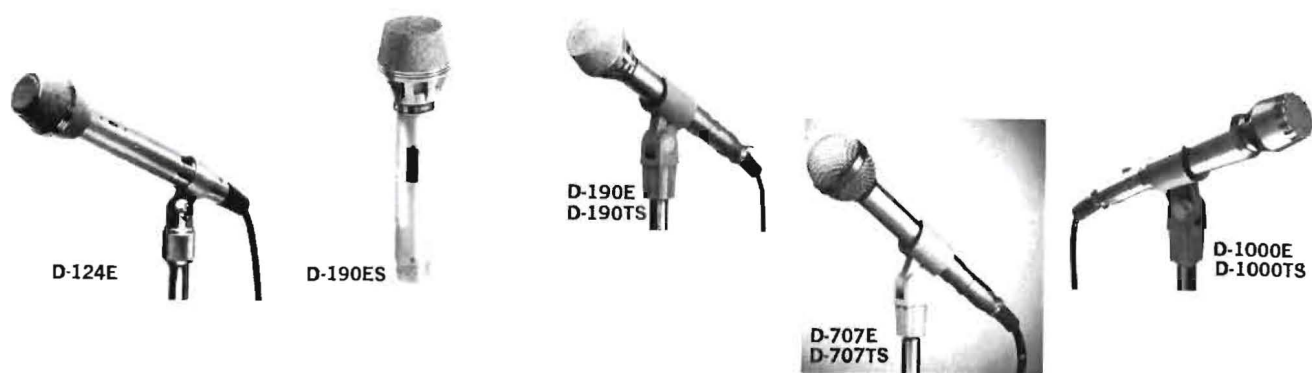

CARDIOID DYNAMIC

	D-124E	D-190ES	D-190E D-190TS	D-707E D-707TS	D-1000E D-1000TS
TYPE	DYNAMIC	DYNAMIC W/ ON-OFF SWITCH	DYNAMIC	DYNAMIC	DYNAMIC W/MODE SWITCH
DIRECTIONAL CHARACTERISTICS					
FREQUENCY RESPONSE Hz	30-16,000	40-15,000	40-15,000	50-15,000	40-16,000
UNIFORMITY OF RESPONSE**	±2.5 dB	±3 dB	±3 dB	±3.5 dB	±3.5 dB
SENSITIVITY†	-54 dB	-53 dB	-53 dB	-53 dB	-52 dB
IMPEDANCE	200 ohms	200	200 or Hi (specify)	200 or Hi (specify)	200 or Hi (Specify)
FRONT-TO-BACK RATIO (1000 Hz)	18 dB	20 dB	20 dB	15 dB	18 dB
DIMENSIONS IN INCHES	5" long, 1 1/4" diam.	6 3/4 x 1 1/2	6 1/4 x 1 1/2	6 x 1 7/16	6 x 1 1/8
WEIGHT	5 oz.	6 oz.	6 oz	4 oz.	9 1/2 oz.
CONNECTIONS	1 = Shield 2 + 3 = Moving coil Cannon XLR-3	1 = Shield 2 + 3 = Moving Coil Cannon XLR-3	1 = Shield 2 + 3 = Moving Coil Cannon XLR-3	1 = Shield 2 + 3 = Moving Coil Cannon XLR-3	1 = Shield 2 + 3 = Moving coil Cannon XLR-3
ACCESSORIES INCLUDED	W-21 Windscreen SA-25 Stand Adapter 15' cable Case	SA-11 Stand adapter 15' Cable Case	SA-11 stand adapter 15' cable Case	SA-11 Stand Adapter 15' Cable Case	SA-12 Stand adapter 15' Cable Case
PROFESSIONAL USER NET	\$120.00	\$60.00*	D-190E = \$55.00 D-190TS = \$70.00*	D-707E = \$45.00 D-707TS = \$60.00*	D-1000E = \$65.00 D-1000TS = \$80.00*
OPTIONAL ACCESSORIES	W-8 Windscreen H-24 Suspension MK series cable AKG Table and Floor Stands	W-8 Windscreen Standard and anti-shock stands *D-190ES is low impedance only with on-off switch on microphone. Order accessory MK-7/T-5 transformer/ phone plug cable for high impedance use.	W-8 Windscreen Standard and anti-shock stands *D-190TS complete with on-off switch, Hi impedance transformer and phone plug.	W-4 Windscreen Standard and anti-shock stands *D-707TS complete with on-off switch, Hi impedance trans- former and phone plug.	W-4 Windscreen Standard and anti-shock stands *D-1000TS complete with on-off switch, Hi impedance trans- former and phone plug.

**Relative to the published curve

†(re 1 mW/10 dynes/cm²)



MICROPHONES HEADPHONES ACCESSORIES

TABLE STANDS



ST-4
ST-4A
ST-41, one push button
ST-43, three push buttons



ST-305

WINDSCREENS



W-2
W-3
W-4



W-17



W-8



W-7
W-21



W-18



W-19

SUSPENSIONS



H-24
H-60



H-15



H-10



H-9



H-68
H-69



H-70

RUBBER GRIP HANDLE



H-7

CABLES



MK-7/S-5
Connector switch



MC-20TS

FLEXIBLE SHAFT



MSH-58E
MSH-58E-2

STAND ADAPTERS



SA-11
SA-12
SA-15



SA-11/1
SA-12/1
SA-15/1
SA-16/1
SA-20/1
SA-25




SA-16
SA-20



SA-18/1
SA-18/3
SA-18/9

AKG Condenser & Dynamic Shot Gun Microphone Systems:



FITTED
CARRYING CASE

C-451/CK-1/CK-9 System, consisting of:




C-451EB Preamplifier
CK-1 Cardioid capsule
W-3 windscreen for above
SA-15/1 stand adapter
CK-9 Shot gun tube
W-19 windscreen for above
SA-18/3 stand adapter
H-69 Boom suspension
H-7 pistol grip
B-46E Battery supply
MC-20 cable
Fitted carrying case
User Net: \$521.00

C-451/CK-9 System, consisting of:

C-451EB Preamplifier
CK-9 Shot gun tube
W-19 windscreen for above
SA-70/3 stand adapter
H-7 pistol grip
B-46E Battery supply
MC-20 cable
Fitted carrying case
User Net: \$405.00

D-900E System, consisting of:

D-900E Microphone
W-19 Windscreen
SA-18/9 stand adapter
H-68 Boom suspension
MC-20 cable
Fitted carrying case
User Net: \$286.00

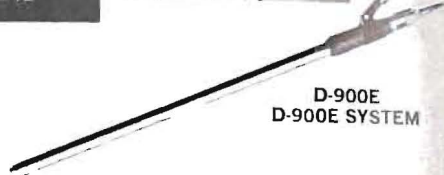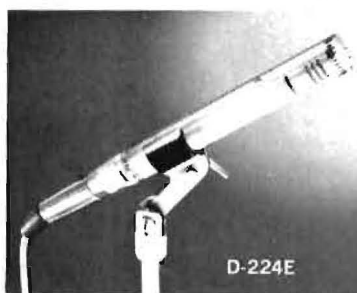

TWO-WAY CARDIOID DYNAMIC

OMNI-DIRECTIONAL

SHOTGUN DYNAMIC

	D-200E D-200TS	D-202E D-202E BOOM	D-224E	D-160E	D-900E D-900E SYSTEM
TYPE	DYNAMIC TWO-WAY	DYNAMIC TWO-WAY	DYNAMIC TWO-WAY	DYNAMIC	DYNAMIC INTERFERENCE/GRADIENT
DIRECTIONAL CHARACTERISTICS					
FREQUENCY RESPONSE Hz	30-15,000	30-15,000	20-18,000	40-18,000	40-13,000
UNIFORMITY OF RESPONSE**	±3 dB	±2 dB	±2 dB	± 2.5 dB	±3 dB
SENSITIVITY†	-55 dB	-53 dB	-55 dB	-55 dB	-50 dB
IMPEDANCE	200	200	200	200	200
FRONT-TO-BACK RATIO (1000 Hz)	18 dB	20 dB	20 dB	non-directional	18 dB
DIMENSIONS IN INCHES	7 ³ / ₈ x 1 ¹ / ₈	8 ¹ / ₂	7 ³ / ₄ x 1 ¹ / ₈	7 x 1 ¹ / ₈	26 ¹ / ₈ x 1 ¹ / ₄
WEIGHT	8 oz.	9.5 oz.	9.5 oz.	7.5 oz.	17 oz.
CONNECTIONS	1 = Shield 2 + 3 = Moving Coil Cannon XLR-3	1 = Shield 2 + 3 = Moving Coil Cannon XLR-3	1 = Shield 2 + 3 = Moving Coil Cannon XLR-3	1 = Shield 2 + 3 = Moving Coil Cannon XLR-3	1 = Shield 2 + 3 = Moving Coil Cannon XLR-3
ACCESSORIES INCLUDED	SA-20 Stand adapter 15' cable Case	SA-16 Stand adapter 15' cable Case	SA-18/3 Stand adapter 15' cable Case	Stand adapter 15' cable Case	Stand adapter 15' cable Case
PROFESSIONAL USER NET	D-200E = \$75.00 D-200TS = \$90.00*	D-202E \$130.00 D-202E Boom* \$215.00	\$195.00	\$60.00	D-900E \$150.00 D-900E SYSTEM = \$286.00*
OPTIONAL ACCESSORIES	W-4 Windscreen Standard and anti-shock stands *D-200TS complete with on-off switch, Hi impedance trans- former and phone plug.	W-7 Windscreen for standard D-202E only. SA-18/9 Stand adapter MK Series Cables *(Boom Version complete with special suspension, front and rear wind screens)	W-2 Windscreen MK Series Cables Standard and anti-shock stands	MK Series Cables Standard and anti-shock stands	W-19 Windscreen SA-18/9 Stand adapter H-68 Boom suspension MK Series Cables *D-900E system is complete with SA-18/9 stand adapter, H-68 boom suspension, W-19 windscreen, MC-20 cable in fitted carrying case.

**Relative to the published curve

†(re 1 mW/10 dynes/cm²)



TYPE

DIRECTIONAL
CHARACTERISTIC

FREQUENCY
RESPONSE Hz

UNIFORMITY OF
RESPONSE**

SENSITIVITY†

IMPEDANCE

FRONT-TO-BACK
RATIO (1000 Hz)

DIMENSIONS
IN INCHES

WEIGHT


CONNECTIONS

ACCESSORIES
INCLUDED

PROFESSIONAL
USER NET

OPTIONAL
ACCESSORIES

**†



SHOTGUN DYNAMIC

D-900E D-900E SYSTEM
DYNAMIC INTERFERENCE/GRADIENT
40-13,000
±3 dB
-50 dB
200
18 dB
26 1/8 x 1 1/4
17 oz.
1 = Shield 2 + 3 = Moving Coil Canon XLR-3
Stand adapter 15' cable Case
D-900E \$150.00 D-900E SYSTEM = \$286.00*
W-19 Windscreen SA-18/9 Stand adapter H-68 Boom suspension MK Series Cables *D-900E system is complete with SA-18/9 stand adapter, H-68 boom suspension, W-19 windscreen, MC-20 cable in fitted carrying case.

LAVALIER DYNAMIC

SPECIAL PURPOSE DYNAMIC

	D-109	D-110 SHOCK MOUNTED*	D-58E D-558B	D-510B	D-590
TYPE	DYNAMIC LAVALIER	DYNAMIC LAVALIER	NOISE-CANCELLING DIFFERENTIAL	DYNAMIC	DYNAMIC
DIRECTIONAL CHARACTERISTICS					
FREQUENCY RESPONSE Hz	50-15,000	50-15,000	D-58E = 70-12,000 D-558B = 200-12,000	100-15,000	200-15,000
UNIFORMITY OF RESPONSE**	±5 dB	±5 dB	± 5 dB	± 3.5 dB	± 3 dB
SENSITIVITY†	-56 dB	-56 dB	-58 dB	-56 dB	-53 dB
IMPEDANCE	200	200	200	200	200
FRONT-TO-BACK RATIO (1000 Hz)	non-directional	non-directional	25 dB	non-directional	20 dB
DIMENSIONS IN INCHES	2 3/4 x 5/8	3 1/8 x 7/32	D-58E = 1 5/8 x 1 3/16 D-558B = 12 5/8 x 7/8	12 5/16 x 7/8	11 1/8 x 1 1/8
WEIGHT	1.5 oz.	2.75 oz.	D-58E = 1.1 oz. D-558B = 9 oz.	9 oz.	9 oz.
CONNECTIONS	1 = Shield 2 = Red (in phase) 3 = White Non-detachable cable	1 = Shield 2 = Red (in phase) 3 = White Non-detachable cable	D-58E = XLR-3: 1 = Shield 2 + 3 = Moving coil D-558B: Non-detachable cable.	1 = Shield 2 = Red (in Phase) 3 = White Non detachable cable	1 = Shield 2 = Red (in Phase) 3 = White Non-detachable cable
ACCESSORIES INCLUDED	Neck cord w/ tie clip 30' cable Case	Neck cord w/ tie clip 30' cable Case	D-58E: Case D-558B: Mounting hardware	8 7/8" flexible shaft with cable plus mounting hardware	9 3/4" flexible shaft with cable plus mounting hardware
PROFESSIONAL USER NET	\$49.00	\$80.00	D-58E: \$45.00 D-558B: \$60.00	\$60.00	\$65.00
OPTIONAL ACCESSORIES		*With internally suspended capsule.	D-58E: MSH-58E 8" flexible shaft MSH-58E2 20" flexible shaft Both: W-3 Windscreen ST-4A/ST-305 Table Stands ST-41 Table Stand, 1 push button ST-43 Table Stand, 3 push buttons	ST-4A/ST-305 Table Stands ST-41 Table Stand W/ 1 push button ST-43 Table Stand W/ 3 push button W-3 Windscreen	ST-4A ST-305 Table Stands ST-41 Table Stand, 1 push button ST-43 Table Stand, 3 push buttons W-8 Windscreen

**Relative to the published curve †(re 1 mW/10 dynes/cm²)

AKG MICROPHONE ACCESSORIES

		User Net			User Net
MICROPHONE TABLE STANDS			HEADPHONE EAR CUSHIONS		
ST-4	Table Stand	\$13.00	Z-52	Ear cushions for K-150	3.00
ST-4A	Table stand, weighted base	\$14.00	Z-64	Ear cushions for K-150	4.00
ST-41	Table stand, 1 push button	25.00	Z-65	Ear cushions for K-100	4.00
ST-43	Table stand, 3 push button	36.00			
ST-305	Anti-shock table stand	25.00			
WINDSCREENS			CABLES FOR CONDENSER MICROPHONES		
W-2	Windscreen for D-224E. Foam type	5.00	MK-17/20	Cable for C-412 and C-414	90.00
W-3	Windscreen for D-58E, C-451E. Foam Type	5.00	MK-24/20	Microphone cable for C-24	95.00
W-4	Windscreen for D-200E, D-1000E. Foam Type	6.00	NF-24/5	Power supply cable for C-24	25.00
W-7	Windscreen for D-202E. Foam Type	7.00	RL-24/10	Pattern selector cable for C-24	57.00
W-8	Windscreen for D-190E/ES 'TS, D-124E. Foam Type	10.00			
W-9A	Rear Windscreen for D-900E and D-202E	6.00			
W-11	Windscreen for C-412	15.00			
W-16	Windscreen for D-160E	20.00			
W-17	Windscreen for C-451E. (CK-1, CK-2)	21.00			
W-18	Windscreen for CK-8	10.00			
W-19	Windscreen for CK-9, D-900E	30.00			
W-21	Windscreen for D-124E	4.00			
STAND ADAPTERS			POWER SUPPLIES FOR CONDENSER MICROPHONES		
SA-11	Stand Adapter for D-190E, D-707E (Replacement) D-160E.	4.00	N-6E	A.C. power supply for 6 C-412, C-414 or C-451E	150.00
SA-11/1	Stand adapter, metal thread, D-190, D-707, D-160	7.00	B-46E	9 volt d.c. battery power supply for C-451E. On-off switch and cannon connectors for in-line use	55.00
SA-12	Stand Adapter for D-1000E (Replacement)	4.00	N-24	Power Supply for C-24	250.00
SA-12/1	Stand adapter, metal thread, D-1000	7.00	N-46E	A.C. power supply for two C-451E. Individual bass roll-off and bass cut. Trim plate for rack panel mounting. Also for C-412, C-414	200.00
SA-15	Stand Adapter for C-451E	6.00	A-52	Phantom powering module for 1 C-451E	20.00
SA-16	Stand Adapter for D-202E, D-900E (Replacement)	6.00			
SA-16/1	Stand adapter, metal thread, D-202, D-900	8.00			
SA-18/1	Stand Adapter for C-451E. Metal w. locking clamp	18.00			
SA-18/3	Stand Adapter for D-224E, CK-9. Metal	18.00			
SA-18/9	Stand Adapter for D-202E, D-900E. Metal, locking	18.00			
SA-20	Stand Adapter for D-200E (Replacement)	6.00			
SA-20/1	Stand adapter, metal thread, D-200	8.00			
SA-70/3	Stand Adapter for CK-9	27.00			
SA-70/9	Stand Adapter for D-900E	27.00			
ANTI-SHOCK SUSPENSIONS			EXTENSION TUBES AND SWIVEL FOR C-451E		
H-7	Rubber "pistol grip" handle for SA-18 adapters	12.00	VR-1	12" extension tube for C-451E. (CK-1, CK-2, CK-6)	40.00
H-9	Clamp mount for H-10	15.00	VR-2	Same as VR-1, except 52" long with swivel mount	110.00
H-10	Stereo bar for 2 microphones	15.00	A-51	Swivel for C-451E. (CK-1, CK-2, CK-6)	25.00
H-15	Suspension (spider) for C-451E	25.00			
H-24	Anti-shock suspension for D-190E, D-707E, D-160E, D-124E	16.00			
H-60	Anti-shock stand suspension for C-451E	16.00			
H-68	Anti-shock boom suspension for D-900E	49.00			
H-69	Anti-shock boom suspension for D-224E and CK-9	49.00			
H-70	Suspension for use with SA-70/3, SA-70/9	22.00			
FLEXIBLE GOOSENECKS			AMPLIFIERS FOR CONDENSER MICROPHONES		
MSH-58E	8" flexible gooseneck with connector for D-58E, D-200E, D-707E, D-190E, D-160E, D-124E	21.00	C-412	Preamplifier with capsule only (Replacement)	250.00
MSH-58E-2	20" flexible gooseneck with connector for D-58E, D-200E, D-707E, D-190E, D-160E, D-124E	25.00	C-414	Preamplifier only (Replacement)	285.00
			C-451E	Preamplifier module only for use with CK-1, CK-1S, CK-2, CK-5, CK-6, CK-9 Condenser Capsules	102.00
			C-451EB	Preamplifier with bass Attenuator	122.00
			C-452	Preamplifier module only, for phantom powering operation requiring 48v	102.00
			V-24	Amplifier with 2 microphone capsules for C-24 system (Replacement)	430.00
CABLES FOR ALL MICROPHONES			CAPSULES FOR C-451E PREAMPLIFIER—INTERCHANGEABLE		
MC-20	20' microphone cable complete with XLR-3 type male and female connectors	14.00	CK-1	Cardioid condenser microphone capsule only for C-451E	64.00
MC-20TS	Microphone cable assembly complete with built-in low to high impedance transformer/phone plug and on-off connector/switch. For all microphones with XLR-3 connector	25.00	CK-1S	Cardioid condenser microphone capsule with rising response	64.00
MC-50	50' microphone cable complete with XLR-3 type male and female connectors	21.00	CK-2	Omni-directional condenser microphone capsule only for C-451E	64.00
MK-7/T-5	15' microphone cable assembly with built-in low to high impedance transformer/phone plug. For all microphones with Cannon XLR-3 connector	20.00	CK-5	Cardioid condenser microphone capsule with integral shock mount and windscreen	90.00
MK-7/S-5	Microphone cable with on-off switch built-in to microphone connectors and free end for amplifier connection. For all microphones with Cannon XLR-3 connector	17.00	CK-6	Variable pattern omni/cardioid figure-eight condenser microphone capsule only for C-451E	160.00
			CK-8	Short shotgun attachment for C-451E	90.00
			CK-9	Interference tube (shotgun) with built-in condenser microphone capsule only for C-451E	120.00
			OUTPUT PADS FOR C-451E		
			A-50/10	10 dB pad for C-451E preamplifier	18.00
			A-50/20	20 dB pad for C-451E preamplifier	18.00

Prices and specifications subject to change without notice

For information and prices on complete line of KM series of MICROPHONE FLOOR STANDS and ACCESSORIES consult separate specification and price sheet.



AKG MICROPHONES • HEADPHONES

DISTRIBUTED BY
NORTH AMERICAN PHILIPS CORPORATION
100 EAST 42ND STREET, NEW YORK, NEW YORK 10017
TEL: (212) 697-3600 TWX: 212 867-5624

AKG Service Department 30-30 Review Avenue
Long Island City, N.Y. 11101 • Tel. (212) 786-6400